

HWN-2100MH-P SERIES NVR

Key Feature

- H.265+/H.265/H.264+/H.264 video compression
- Up to 40/60 Mbps incoming bandwidth, and 60 Mbps outgoing bandwidth
- Up to 4/8-ch network camera inputs
- Up to 4-ch 1080p decoding capability
- HDMI and VGA simultaneous output



Compression and Recording

- H.265+ compression effectively reduces the storage space by up to 75%
- Full channel recording at up to 6 MP resolution

Storage and Playback

- 1-ch@6 MP or 4-ch@1080p playback resolution
- 1 SATA interface (up to 6 TB capacity per HDD)

Smart Function

- Supports line crossing and intrusion detection
- Smart search for the selected area in the video; and smart playback to improve the playback efficiency
- Automatically search and add network cameras after device is activated

Network & Ethernet Access


- 4/8 independent PoE network interfaces
- 1 self-adaptive 10/100 Mbps Ethernet interface
- Hik-Connect for easy network management



Specification


| Model | HWN-2104MH-4P | HWN-2108MH-8P |
|---------------------------------------|---|---|
| Video and Audio | | |
| IP video input | 4-ch | 8-ch |
| | Up to 6 MP resolution | |
| Incoming bandwidth | 40 Mbps | 60 Mbps |
| Outgoing bandwidth | 60 Mbps | |
| HDMI output | 1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz | |
| VGA output | 1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz, HDMI/VGA simultaneous output | |
| Decoding | | |
| Decoding format | H.265+/H.265/ H.264+/H.264 | |
| Recording resolution | 6 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF | |
| Synchronous playback | 4-ch | 8-ch |
| Capability | 4-ch@1080p (25 fps), 1-ch@6 MP (25 fps) | |
| Stream type | Video, Video & Audio | |
| Network | | |
| Remote connection | 16 | |
| Network protocol | TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, UPnP™ | |
| Network interface | 1, RJ-45 10/100 Mbps self-adaptive Ethernet interface | |
| PoE | | |
| Interface | 4, RJ-45 10/100 Mbps self-adaptive Ethernet interface | 8, RJ-45 10/100 Mbps self-adaptive Ethernet interface |
| Power | ≤ 36 W | ≤ 75 W |
| Supported standard | IEEE 802.3 af/at | |
| Auxiliary interface | | |
| SATA | 1 SATA interface | |
| Capacity | Up to 6 TB capacity for each disk | |
| Alarm in/out | N/A | |
| USB interface | Rear panel: 2 × USB 2.0 | |
| General | | |
| Power supply | 48 VDC | |
| Consumption (without HDD and PoE off) | ≤ 10 W | |
| Working temperature | -10 °C to 55 °C (14 °F to 131 °F) | |
| Working humidity | 10% to 90% | |
| Dimension (W × D × H) | 265 × 225 × 48 mm (10.4" × 8.9" × 1.9") | |
| Weight (without HDD) | ≤ 1 kg (2.2 lb) | |
| Certification | | |
| FCC | Part 15 Subpart B, ANSI C63.4-2014 | |
| CE | EN50130-4, EN 61000-3-2, EN 61000-3-3 | |

Dimension

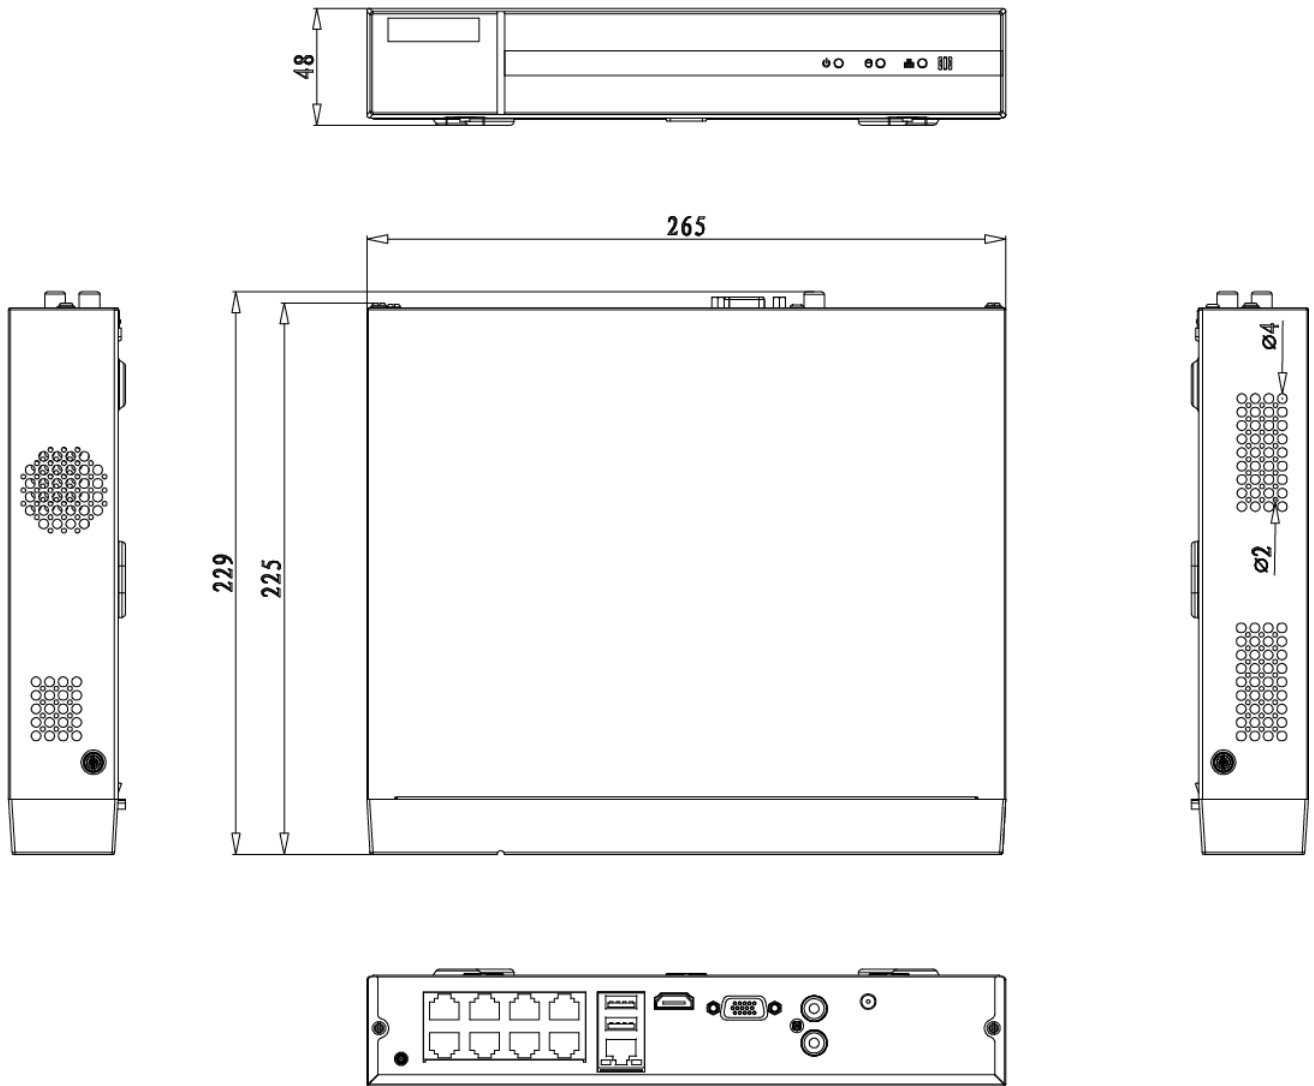

Unit: mm

Physical Interface

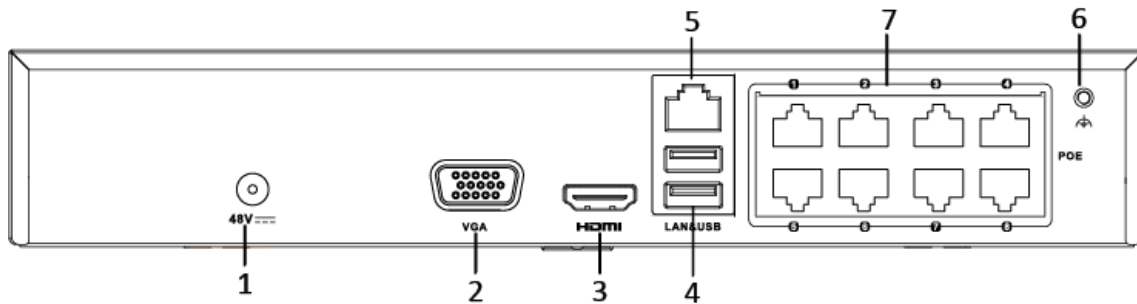

*: The rear panel of HWN-2104MH-4P provides 4 PoE interfaces.

| No. | Description | No. | Description |
|-----|----------------|-----|--------------------------------------|
| 1 | Power supply | 5 | LAN Network Interface |
| 2 | VGA interface | 6 | Ground |
| 3 | HDMI interface | 7 | Network Interfaces with PoE function |
| 4 | USB interface | | |

Available Model

HWN-2104MH-4P, HWN-2108MH-8P

Distributed by



HIKVISION[®]
HiWatch Series

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
potand@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

03041041090722